



Radio without MID or IRIS


Remove knob from volume control.

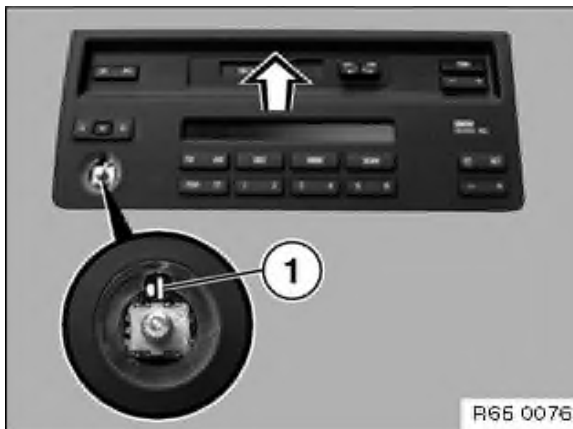

Insert screwdriver (5.5) into slot (1) approx. 1 mm and turn through 90

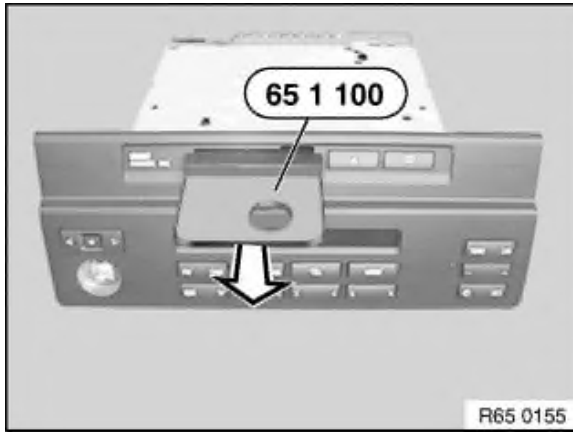

Hook special tool 65 1 100 into cassette socket and pull out radio.

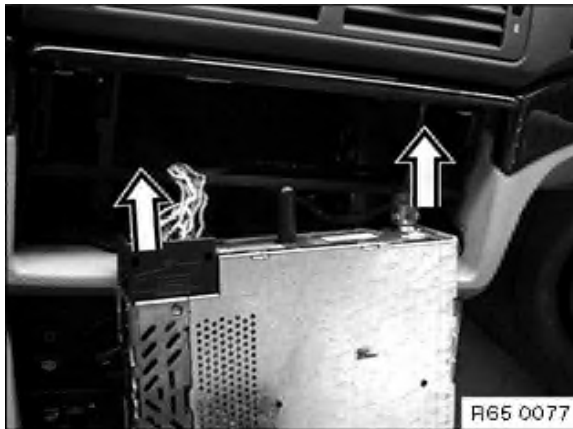

Unfasten plug connection.



Radios with MID or IRIS

Remove MID or IRIS.

Release hexagon-socket-head cap screws on left and right and pull out radio.

Unfasten plug connection.

