



65 11 030

**Removing and installing / replacing radio receiver**

Fold right and left finisher over and unfasten screw.

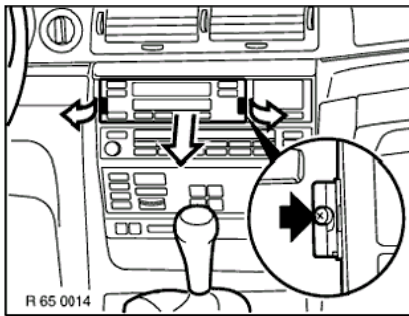

Pull out radio and remove connector.

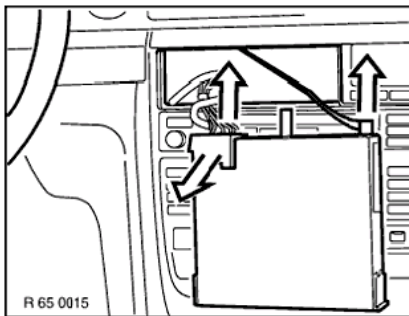


65 81 010

Removing and installing or replacing Multi-Information-Display (MID)

Removing radio,

refer to 65 11 030.

Press down clips, push MID forwards and remove connector.

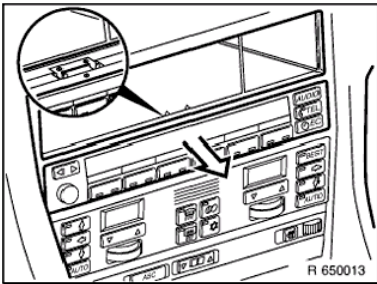


64 11 750

### Removing and installing heater control


Remove switch or switch unit underneath heater control.

Press out heater control through switch openings towards front and disconnect plug.

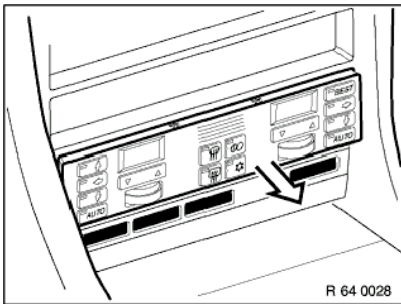


61 31 214


**Removing and installing / replacing switch for electronic damper control**

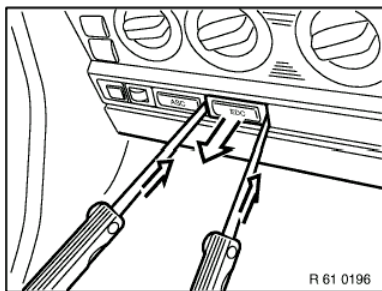

Insert two feeler gauges (approx. 0.25) into side of switch, press together the clips, then pull switch forward.

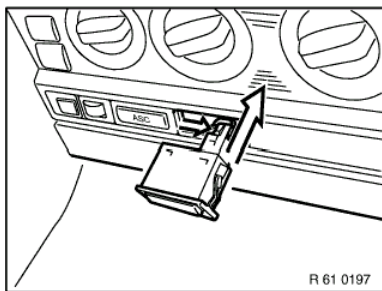


Press together clips and remove connector.

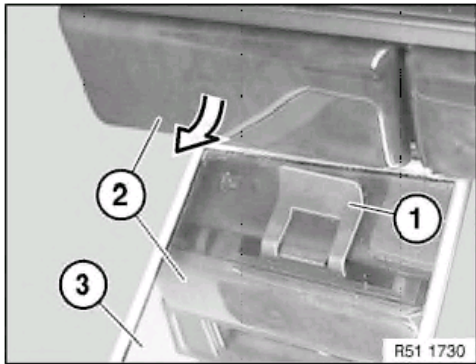


Snap out locking element (1) and lift out trim (2).


3 Hand mirror

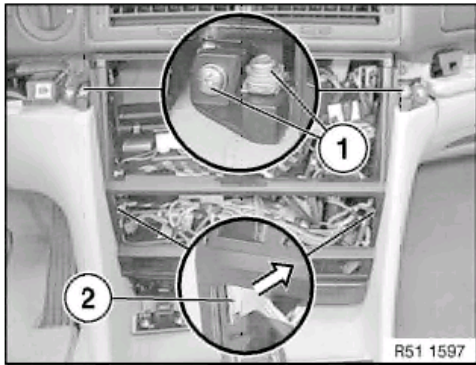

Release screws (1) and clips (2) on left/right.

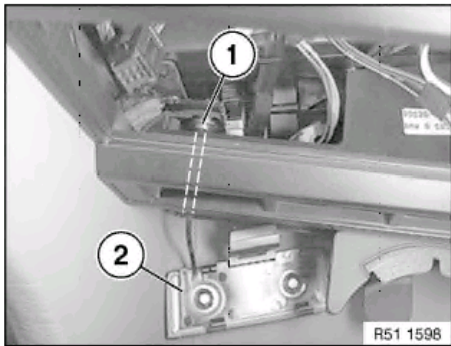


Release screw (1) above opening of detached trim (2).

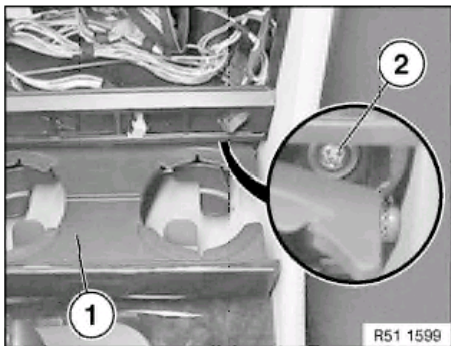

Open cup holder (1).


Release screw (2) underneath cup holder cover.

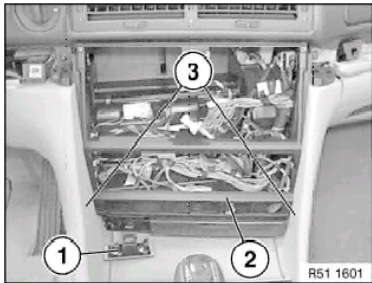


Unhook and remove retaining strap from trim (1).

**Note:**

When removing function carrier (2), under no circumstances damage side of storage shelf (3).

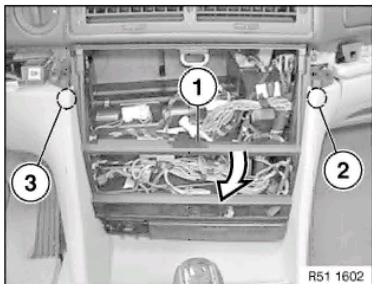

First lift out function carrier (1)  
on passenger side (2),  
unscrew a little,  
then lift out on driver's side (3)  
and remove.

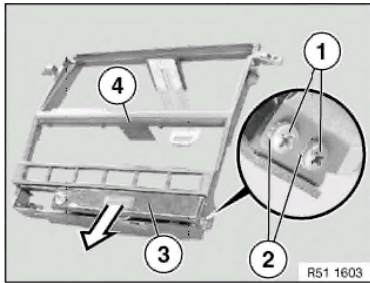

Release screws (1) with toothed washers (2) on left/right.

Remove cup holder (3) from function carrier (4).


**Installation:**

Insert cup holder (3) and initially tighten screws (1) with toothed washers (2) on left/right, do not tighten down fully.

Align cup holder in correct position and tighten down screws (1) on left/right.

Tightening Torque,

refer to Technical Data 51 16 6AZ

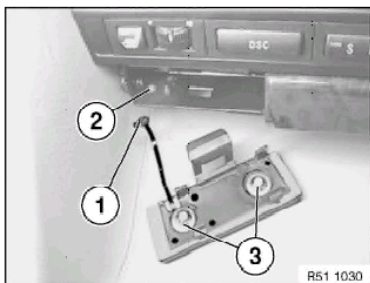

**Installation:**

Insert retaining strap (1) in support (2).

Install retaining rings (3) if necessary.